

SHANTUI

VALUE THAT WORKS

SE215W

LOG LOADER



Engine Model: Weichai WP7H
Gross Power: 140 kW/2000 rpm
Operating Weight: 21,900 kg
Bucket Capacity: 1.1 m³

 **COLMAR**
Soluciones en maquinaria

SE215W SPECIFICATIONS

LOG LOADER

ENGINE

Model	Weichai WP7H
Type	High pressure common rail, turbocharged.
No. of cylinder	6
Emission	Tier 3 / Stage III
Displacement	6.8L
Power output	140kW/2000rpm

HYDRAULIC SYSTEM

Type	Axial variable plunger pump
Max. discharge flow	2x270L/min

TRAVEL SYSTEM

Type	Axial variable plunger motor
Track roller	2x8
Carrier roller	2x2
Track shoe	2x47
Travel speed	3.3/5.3km/h
Max. Drawbar pull	3.3/5.3km/h
Gradeability	70% (35°)

SWING SYSTEM


Swing motor type	Swash plate plunger motor
Max. discharge flow	2x270L/min

REFILL CAPACITIES & LUBRICATIONS

Fuel tank	405L
Cooling system	30L
Engine oil	25L
Hydraulic oil tank	190L
System Capacity	400L


OPERATING WEIGHT AND GROUND PRESSURE

Shoe width	600mm
Ground pressure	47.7kPa
Operating weight	21900kg

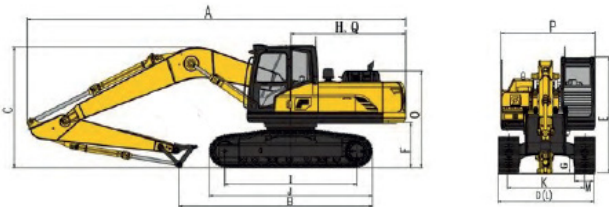

SCOPE OF WORK (mm) (BOOM: 5700 mm ARM: 2925 mm)

A	Max. height	10100
B	Max. dumping height	7190
C	Max. dumping depth	6490
D	Max. vertical depth	5770
E	Max. depth cut for 2500mm level	6295
F	Max. distance	9865
G	Max. radius at ground level	9680
H	Min. swing radius of work equipment	2970

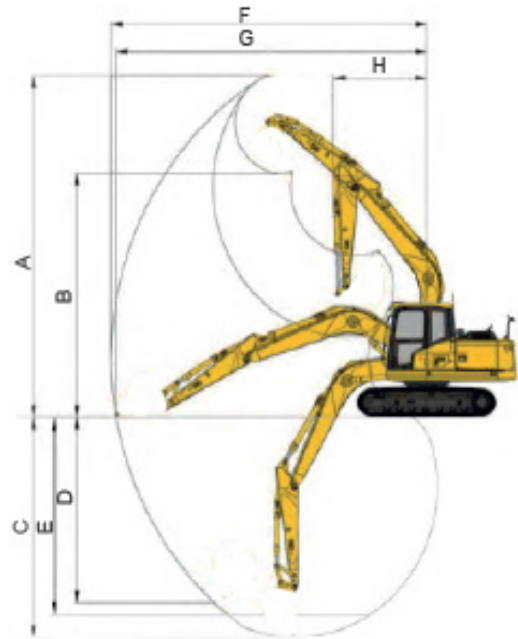

DIMENSIONS (mm)

A	Overall length	9605
B	Ground contact length (Transportation)	4915
C	Overall height(to top of boom)	3040
D	Overall width	3080
E	Overall height(to top of cab)	3070
F	Counter weight ground clearance	1080
G	Ground clearance	470
H	Tail swing radius	2925
I	Tread	3460
J	Track length	4270
K	Track gauge	2380
L	Track width	3080
M	Shoe width	700
O	Bonnet height	2400
P	Revolving frame width	2725
Q	Distance from swivel center to tail	2920



Shantui Social

SHANTUI CONSTRUCTION MACHINERY CO., LTD.

ADD: No. 58, G327 Highway, Jining City, Shandong, CHINA

TEL: +86-537-2909369

FAX: +86-537-2311219

EMAIL: trade@shantui.com

WEB: www.shantui.com

SHANTUI
VALUE THAT WORKS

COLMAR
Soluciones en maquinaria